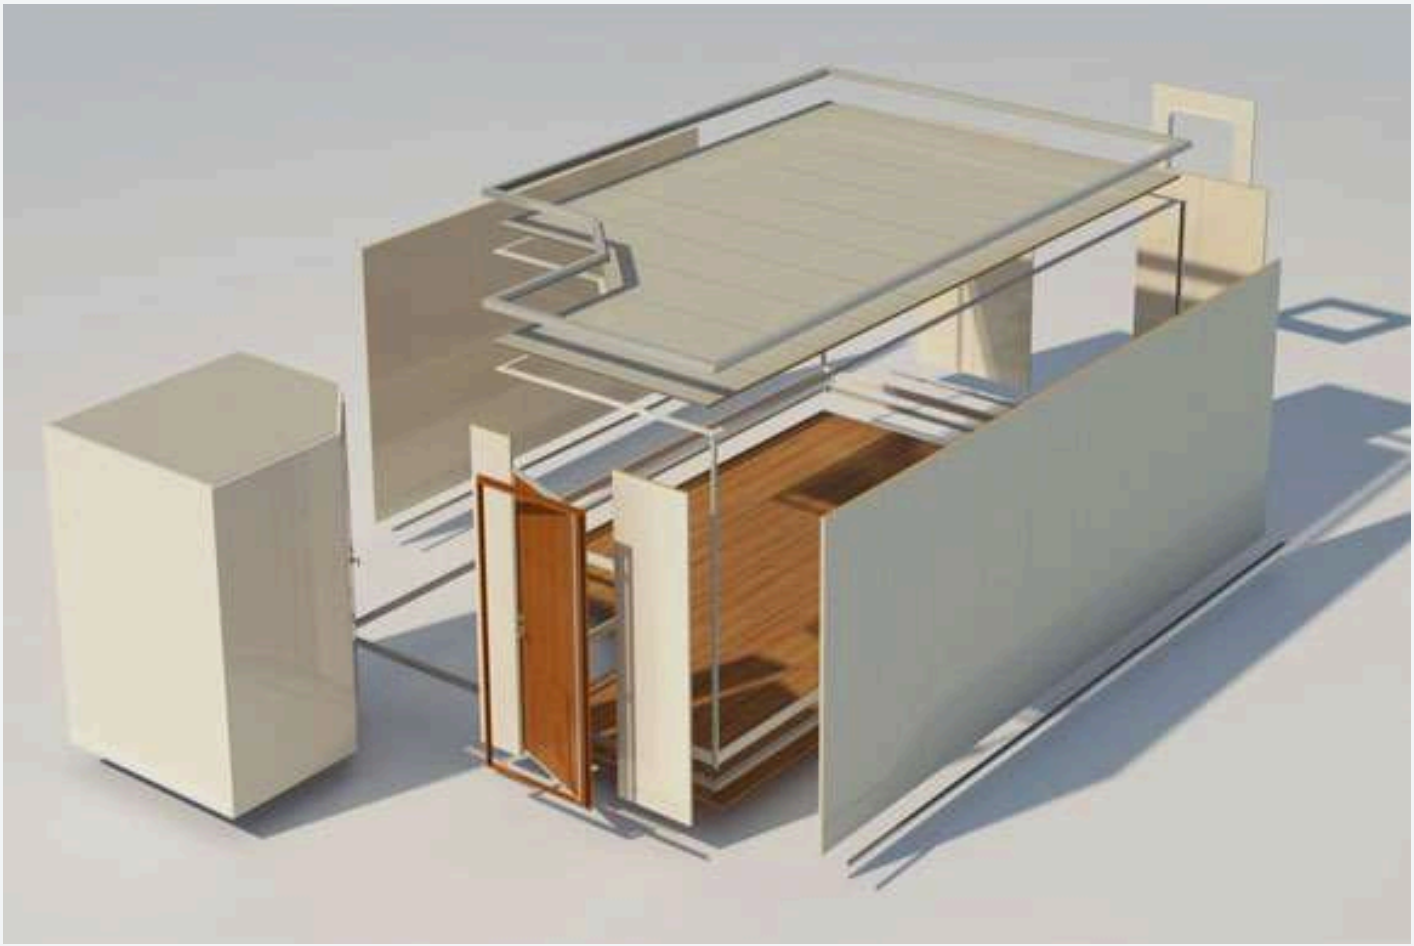
4SEA MATERIALS COLLECTION

MARINE ACCOMMODATION PRODUCT GUIDE 2026



Approved marine accommodation products from stock

Panels / Profiles / Doors / Access hatches

Products at a glance

Building on over 20 years of experience in supplying marine accommodation materials worldwide, Verotek BV offers the 4SEA Materials product range in cooperation with established international partners. We maintain a stock of IMO-approved products for immediate dispatch from our warehouse in the Netherlands.

In addition to our stock range, we can supply bespoke products tailored to individual customer specifications.

All products are supplied with Marine Equipment Directive (MED) approval and are covered by our 12-month warranty.


Soft core wall panels	03
Partition panel profiles	04
Lining panel profiles	05
Cladding panels and profiles	06
A60 floating floor panels	07
Pyrotek Quadzero dBX	08
Ceiling panels and profiles	09
B15 cabin doors	10
B15 and A60 doors	11
B15 access hatches	12
Contact Verotek	13

Soft core wall panels

Stock Products


Stock ‘Soft Core’ Wall Panels

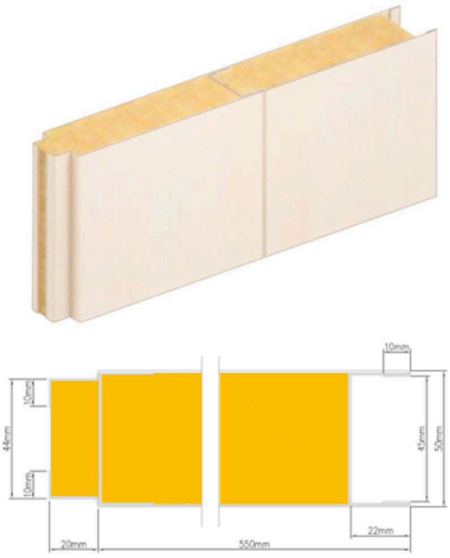Type ‘A’ Partition Panel



Panel:	**JCP-B3 Partition**
Type:	Type ‘A’ T&G Joint
Fire Class:	B15
Thickness:	50mm
Height:	2200mm 2400mm
Width:	550mm
Weight:	18.6kg/m^2
Sound Reduction (Rw):	35dB
Finish:	Gislaved 027-1058 (White) Both Faces
HS Code:	7308905100










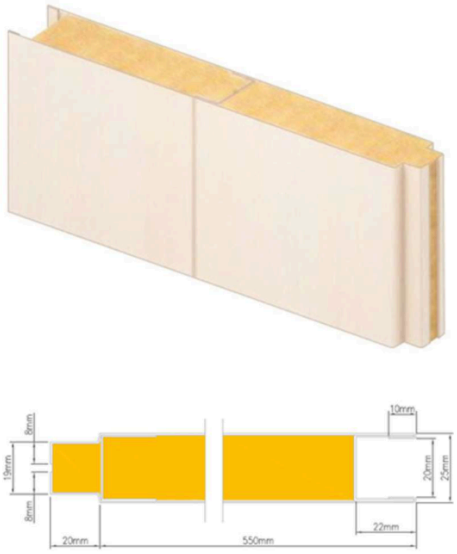
Type ‘A’ Lining Panel



Panel:	**JCP-L3 Lining**
Type:	Type ‘A’ T&G Joint
Fire Class:	B15
Thickness:	25mm
Height:	2200mm 2400mm
Width:	550mm
Weight:	15.2kg/m^2
Sound Reduction (Rw):	31dB
Finish:	Gislaved 027-1058 (White) Galvanised Steel Reverse
HS Code:	7308905100









Partition panel profiles

Stock ‘Soft Core’ Partition Panel Profiles

FB02(T) Top Profile  	Length: 3000mm Thickness: 1mm Weight: 0.94 Kg/m Finish: Galvanised Steel HS Code 7308905100 Notes: 1. Supplied with 5mm Diameter Holes at 375mm Spacing
FB02(B) Bottom Profile  	Length: 3000mm Thickness: 1mm Weight: 0.94 Kg/m Finish: Galvanised Steel HS Code: 7308905100 Notes 1. Supplied with 5mm Diameter Holes at 375mm Spacing
FB08 End Profile  	Length: 2200mm Thickness: 0.6mm Weight: 0.57 Kg/m Finish: PVC Foil Stock Finish: Gislaved 027-1058 (White) HS Code: 7308905100
FB07 Internal Angle Profile  	Length: 2200mm Thickness: 0.6mm Weight: 0.49 Kg/m Finish: PVC Foil Stock Finish: Gislaved 027-1058 (White) HS Code: 7308905100
FB09 External Angle Profile  	Length: 2200mm Thickness: 0.6mm Weight: 0.99 Kg/m Finish: PVC Foil Stock Finish: Gislaved 027-1058 (White) HS Code: 7308905100

Lining panel profiles


Stock ‘Soft Core’ Lining Panel Profiles

FL08(T) Top Profile  	Length: 3000mm Thickness: 1mm Weight: 0.75 Kg/m Finish: Galvanised Steel HS Code: 7308905100 Notes 1. Supplied with 5mm Diameter Holes at 375mm Spacing
FL08(B) Bottom Profile  	Length: 3000mm Thickness: 1mm Weight: 0.75 Kg/m Finish: Galvanised Steel HS Code: 7308905100 Notes 1. Supplied with 5mm Diameter Holes at 375mm Spacing
FL14 End Profile  	Length: 2200mm 2980mm Thickness: 0.6mm Weight: 0.45 Kg/m Finish: PVC Foil Stock Finish: Gislaved 027-1058 (White) HS Code: 7308905100
FL13 Corner Profile  	Length: 2200mm Thickness: 0.6mm Weight: 0.92 Kg/m Finish: PVC Foil Stock Finish: Gislaved 027-1058 (White) HS Code: 7308905100

Cladding panel system

Stock Cladding Panel System

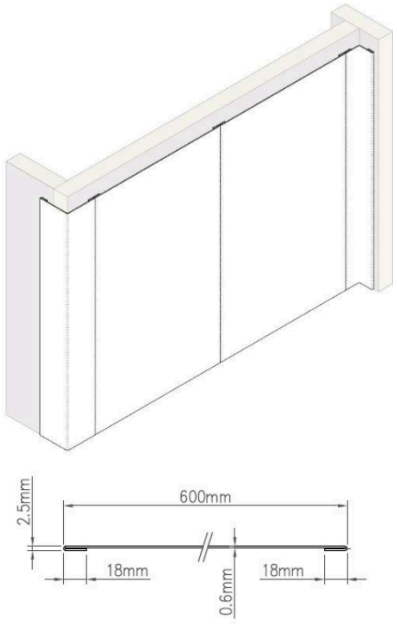Cladding Panels




Panel:	PVC Coated Mild Steel
Type:	Folded Long Edges
Overall Thickness:	0.6mm (Sheet) 2.5mm (Long Edges only)
Fire Class	Low Flame Spread
Height:	2500mm
Width:	600mm
Weight:	5.4 kg/m^2
Sound Reduction (Rw):	n/a
Finish:	Replasa U63 (White) Galvanised Steel Reverse
HS Code:	7308905900


Notes

1. Stock panels are supplied with protective foil on décor side.
2. Available from stock in The Netherlands.
3. Other finishes available upon request.

Stock Cladding Profiles


Internal Angle Profile






Length:	2500mm
Thickness:	0.6mm 2.5mm Long Edges
Weight:	0.4 Kg/m
Finish:	Replasa U63 (White)
HS Code:	7308905100

External Angel Profile






Length:	2500mm
Thickness:	0.6mm 2.5mm Long Edges
Weight:	0.63 Kg/m
Finish:	Replasa U63 (White)
HS Code:	7308905100

Floating floor panels

Stock Floating Floor Panels

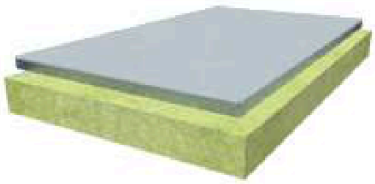A60 Floating Floor Panels





Panel:	ENSAR Floating Floor Panels
Type:	2mm thick Galvanised Steel Sheet bonded to 60mm thick Mineral Wool slabs
Fire Class:	A60
Overall Thickness:	62mm
Length:	1000mm
Width:	300mm
Mineral Wool Density:	200 kg/m^3
Weight:	29.4 kg/m^2
Sound Reduction (Rw):	35dB Panels only 45dB Panels and Steel Deck
Finish Options:	Galvanised Steel
HS Code:	68080000

Notes

1. Available from stock in The Netherlands.
2. Interlocking joints.

Acoustic barrier

Pyrotek Quadzero dBX

Pyrotek Quadzero dBX





Product:	**Pyrotek Quadzero dBX**
Type:	Noise Barrier
Fire Class:	Low Flame Spread
Thickness:	4mm
Length:	5000mm (Rolls)
Width:	1350mm
Weight:	8.0kg/m^2
Sound Reduction:	31dB
Finish:	Aluminium Foil covered Glass Cloth facing
Reverse:	Plain or Self-Adhesive
HS Code:	39269097

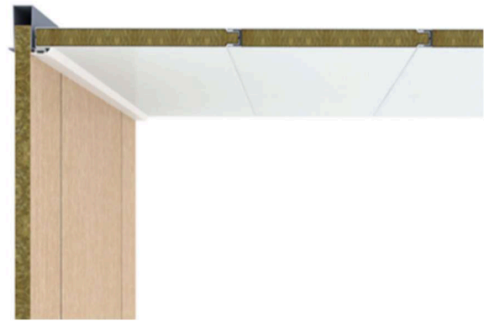
Notes

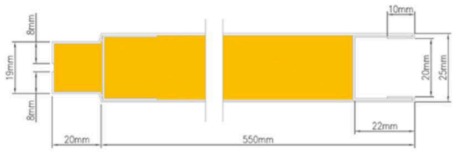
1. Rolls can be supplied from stock with either a Plain or Self-Adhesive backing.

Ceiling panels and profiles

Stock Ceiling Panels

Ceiling Panels – JCP-C2, Tongue & Groove







Panel:	**JCP-C2 Self Supporting Ceiling**
Fire Class:	B15
Thickness:	25mm
Length:	2200mm
	2400mm
Width:	550mm
Weight:	15.7kg/m^2
Sound Reduction (Rw):	30dB
Finish:	Gislaved 027-1058 (White)
HS Code:	7308905100

Stock Ceiling Panel Profiles


FC02 Perimeter Profile






Length:	3000mm
Thickness:	1mm
Weight:	0.57 Kg/m
Finish:	PVC Foil
Stock Finish:	Gislaved 027-1058 (White)
HS Code:	7308905100

FC03 Hanger Profile





Length:	3000mm
Thickness:	1.2mm + 0.6mm
Weight:	2.05 Kg/m
Finish:	PVC Foil
Stock Finish:	Gislaved 027-1058 (White)
HS Code:	7308905100

Cabin doors

Stock Doors

B15 Cabin Door



Door:	**CGFM-3a**
Type:	Single Leaf
Fire Class:	B15
Clear Opening Height:	1950mm
Clear Opening Width:	600mm
Sill:	20mm
Handing:	Right Hand and Left Hand
Door Leaf Thickness:	40mm
Weight:	60kg
Sound Reduction (Rw):	32dB
Finish	
Door Leaf:	Gislaved 027-1058 (White)
Frame:	RAL 9010
Hardware:	C-1 Lock (Key & Thumbturn)
HS Code:	7308300000
Note:	
Door Handing Shown:	Right Hand (Europe) Left Inside (Asia)

B15 Cabin WC Door



Door:	**CGFM-3b**
Type:	Single Leaf
Fire Class:	B15
Clear Opening Height:	1800mm
Clear Opening Width:	600mm
Sill:	120mm
Handing:	Right Hand and Left Hand
Door Leaf Thickness:	40mm
Weight:	60kg
Sound Reduction (Rw):	32dB
Finish	
Door Leaf:	Gislaved 027-1058 (White)
Frame:	RAL 9010
Hardware:	C-4 Lock (Thumbturn & Indicator)
HS Code:	7308300000
Note:	
Door Handing Shown:	Left Hand (Europe) Left Outside (Asia)

Internal doors

Stock Doors (continued)

B15 Door



Door:	**B-17-002**
Type:	Single Leaf
Fire Class:	B15
Clear Opening Height:	1950mm
Clear Opening Width:	650mm
Sill:	20mm
Handing:	Right Hand and Left Hand
Door Leaf Thickness:	42mm
Weight:	55kg
Sound Reduction (Rw):	35dB
Finish	
Door Leaf:	Gislaved 027-1058 (White)
Frame:	RAL 9010
Hardware:	Remor 164-018 (Key & Thumbturn)
HS Code:	7308300000
Note:	
Door Handing Shown:	Right Hand (Europe) Right Outside (Asia)

A60 Internal Door



Door:	**ENSAR A60 Door**
Type:	Single Leaf Internal Door
Fire Class:	A60
Clear Opening Height:	1900mm
Clear Opening Width:	700mm
Sill:	Weld In Frame
Door Leaf Thickness:	77mm
Weight:	91kg
Sound Reduction (Rw):	-
Finish	
Door Leaf:	RAL 7040 (Grey)
Frame:	RAL 7040 (Grey)
Hardware:	ENSAR Standard (Key & Thumbturn)
HS Code:	7308300000
Note:	
Door Handing Shown:	Right Hand (Europe)

Access hatches

Access Hatches

B15 Ceiling Access Hatch



Door:	**HL-TJXM-A**
Type:	Single Leaf
Fire Class:	B15
Clear Opening (H x W):	400mm x 400mm
Hole in Ceiling:	460mm x 460mm
Sill:	n/a
Handing:	n/a
Door Leaf Thickness:	40mm
Weight:	10kg
Sound Reduction:	n/a
Finish	
Door Leaf:	Gislaved 027-1058 (White)
Frame:	RAL 9010
Hardware:	Triangle Lock
HS Code:	7308300000

Note: For installation into B15 rated ceiling panels.

B15 Wall Access Hatch



Door:	**HL-BJXM-A**
Type:	Single Leaf
Fire Class:	B15
Clear Opening (H x W):	400mm x 400mm (Stock)
Clear Opening (H x W):	600mm x 500mm (Stock)
Hole in Bulkhead:	Clear Opening +60mm
Sill:	n/a
Handing:	n/a
Door Leaf Thickness:	40mm
Weight:	10 - 15kg
Sound Reduction:	n/a
Finish	
Door Leaf:	Gislaved 027-1058 (White)
Frame:	RAL 9010
Hardware:	Triangle Lock
HS Code:	7308300000

Note: For installation into B15 rated wall panels.

Let's discuss your next project

Verotek BV

+31 (0)180 202025

info@verotek.nl

OFFICE

Maerlandtweg 18
2921 LC Krimpen aan den IJssel
The Netherlands

OFFICE HOURS

08:00 - 17:00
Monday to Friday

COMPANY DETAILS

CoC Nr. 69107645
VAT Nr. NL857738021B01